

# HSP Duct Powerful and Flexible

Managing high external static pressures up to 25mmAq, this powerful HSP Duct provides a very large coverage area with outstanding cooling and heating performance. HSP Duct is an ideal fit for spaces with high ceilings, and can be flexibly installed in various environments.



Pre Filter



Easy Filter



High Lift-up



Smart Control



Wired RC



# 7 HSP(High static pressure) duct

## 7-1. Specifications

### 1) Technical specifications

Model				AM112FNHDEH***	AM128FNHDEH***	AM140FNHDEH***	AM220FNHDEH***	AM280FNHDEH***
Power Supply		Ø, #, V, Hz		1, 2, 220~240, 50	1, 2, 220~240, 50	1, 2, 220~240, 50	1, 2, 220~240, 50	1, 2, 220~240, 50
Mode*1)			-	HP / HR	HP / HR	HP / HR	HP/HR	HP/HR
Performance	Capacity (Nominal)	Cooling*2)	kW	11.2	12.8	14.0	22.4	28.0
			Btu/h	38,200	43,700	47,800	76,400	95,500
		Heating*3)	kW	12.5	13.8	16.8	25.0	31.5
			Btu/h	42,700	47,100	57,300	85,300	107,500
Power	Power Input (Nominal)	Cooling*2)	W	510	560	625	530	790
				Heating*3)	510	560	625	530
	Current Input (Nominal)	Cooling*2)	A	3.6	3.75	3.9	3.8	5.9
				Heating*3)	3.6	3.75	3.9	3.8
Fan	Motor	Type	-	Sirocco Fan / AC	Sirocco Fan / AC	Sirocco Fan / AC	Sirocco Fan	Sirocco Fan
		Output	W	-	-	-	400	400
		Number of unit	EA	2	2	2	1	1
	Air Flow Rate	H/M/L (UL)	CMM	32 / 27 / 23	35 / 31 / 26	39 / 33 / 28	58.00/52.00/47.00	72.00/65.00/58.00
			l/s	533.33/450.00/383.33	583.33/516.67/466.67	650.00/550.00/466.67	966.67/866.67/783.33	1,200.00/1,083.33/966.67
	External Pressure	Min / Std / Max	mmAq	5 / 10 / 20	5 / 10 / 20	5 / 10 / 20	5.00/15.00/25.00	5.00/15.00/28.00
			Pa	49 / 98.1 / 196.1	49 / 98.1 / 196.1	49 / 98.1 / 196.1	49.03/147.10/245.17	49.03/147.10/274.59
			WG	-	-	-	-	-
Option Code			-	015A23-10013A-200000-300000	015A23-12017C-200000-300000	015A23-1301CF-200000-300000	011054-1950E8-20DCDC-331110	011054-19545B-231C1C-331110
Piping Connections	Liquid Pipe	Ø, mm	9.52	9.52	9.52	9.52	9.52	
		Ø, inch	3/8	3/8	3/8	3/8	3/8	
	Gas Pipe	Ø, mm	15.88	15.88	15.88	19.05	22.23	
		Ø, inch	5/8	5/8	5/8	3/4	7/8	
Drain Pipe	Ø, mm	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)		
Field Wiring	Power Source Wire	Below 20m / over 20m	mm <sup>2</sup>	1.5 / 2.5	1.5 / 2.5	1.5 / 2.5	1.5 / 2.5	1.5 / 2.5
	Transmission Cable		mm <sup>2</sup>	0.75~1.5	0.75~1.5	0.75~1.5	0.75~1.5	0.75~1.5
Refrigerant	Type	-	-	R410A	R410A	R410A	R410A	R410A
	Control Method	-	-	EEV	EEV	EEV	EEV INCLUDED	EEV INCLUDED
Sound	Sound Pressure	High / Mid / Low*4)	dBA	43.0/41.0/39.0	44.0/42.0/40.0	45.0/43.0/41.0	45 / 43 / 41	48 / 46 / 43
Dimensions	Net Weight		kg	62	62	62	89.00	89.00
	Shipping Weight		kg	70	70	70	99.00	99.00
	Net Dimensions (W×H×D)		mm	1,200 x 360 x 650	1,200 x 360 x 650	1,200 x 360 x 650	1240 x 470 x 1040	1240 x 470 x 1040
	Shipping Dimensions (W×H×D)		mm	1,447 x 425 x 769	1,447 x 425 x 769	1,447 x 425 x 769	1507 x 558 x 1155	1507 x 558 x 1155
Panel Size	Panel model		-	-	-	-	-	-
	Panel Net Weight		kg	-	-	-	-	-
	Shipping Weight		kg	-	-	-	-	-
	Net Dimensions (W×H×D)		mm	-	-	-	-	-
	Shipping Dimensions (W×H×D)		mm	-	-	-	-	-
Additional Accessories	Drain pump	Drain pump	- / Model	Optional / MDP-M075SGU2	Optional / MDP-M075SGU2	Optional / MDP-M075SGU2	MDP-N047SNC1D	MDP-N047SNC1D
		Max. lifting Height / Displacement	mm/liter/h	750 / 24	750 / 24	750 / 24	750 / 24	750 / 24
	Air Filter		-	-	Long life filter	Long life filter	Long life filter	-

\* Specifications may be subject to change without prior notice for product improvement.

\*1) Mode

- HP : Heat Pump, HR : Heat Recovery

\*2) Nominal cooling capacities are based on;

- Indoor temperature : 27°C DB, 19°C WB

- Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m

\*3) Nominal heating capacities are based on;

- Indoor temperature : 20°C DB, 15°C WB

- Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m

\*4) Sound pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

## 7-2. Capacity tables

### 1) Cooling

TC : Total Capacity(kW), SHC : Sensible Heat Capacity(kW)

Model	Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)													
		20 (°C, DB)		23 (°C, DB)		26 (°C, DB)		27 (°C, DB)		28(°C, DB)		30 (°C, DB)		32 (°C, DB)	
		14 (°C, WB)		16 (°C, WB)		18 (°C, WB)		19 (°C, WB)		20 (°C, WB)		22 (°C, WB)		24 (°C, WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
112	10	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.5	8.3	13.6	8.4
	12	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.5	8.3	13.6	8.4
	14	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.5	8.3	13.5	8.3
	16	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.5	8.3	13.5	8.3
	18	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	20	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	21	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	23	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	25	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	27	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	29	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	31	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	33	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	35	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.4	8.2	13.4	8.3
	37	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.7	8.6	12.3	8.2	13.2	8.2
	39	8.5	7.0	9.3	7.5	10.7	8.3	11.2	8.5	11.6	8.5	12.1	8.0	13.0	8.0
42	8.5	7.0	9.3	7.5	10.7	8.3	10.9	8.3	11.3	8.3	11.6	7.7	12.6	7.8	
44	8.5	7.0	9.3	7.5	10.7	8.3	10.9	8.3	11.3	8.3	11.6	7.7	12.4	7.7	
128	10	9.7	8.0	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.3	9.8	15.4	9.8
	12	9.7	8.0	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.3	9.8	15.3	9.7
	14	9.7	8.0	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.3	9.8	15.3	9.7
	16	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.2	9.6
	18	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	20	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	21	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	23	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	25	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	27	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	29	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	31	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	33	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	35	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.3	10.0	14.2	9.7	15.1	9.6
	37	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.2	9.9	14.0	9.6	14.9	9.4
	39	9.7	8.2	10.4	8.3	12.0	8.9	12.8	10.0	13.1	9.8	13.8	9.4	14.5	9.2
42	9.7	8.2	10.4	8.3	12.0	8.9	12.4	9.7	12.7	9.5	13.2	9.0	13.7	8.7	
44	9.7	8.2	10.4	8.3	12.0	8.9	12.4	9.7	12.7	9.5	13.2	9.0	13.7	8.7	
140	10	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.7	11.3	15.7	11.0	16.8	10.9
	12	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.6	10.9	16.7	10.9
	14	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.6	10.9	16.7	10.9
	16	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.6	10.9	16.6	10.8
	18	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.6	10.8
	20	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	21	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	23	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	25	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	27	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	29	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	31	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	33	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	35	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.5	10.9	16.5	10.7
	37	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.6	11.2	15.4	10.8	16.3	10.6
	39	10.5	9.1	11.6	9.9	13.3	10.9	14.0	11.2	14.5	11.2	15.1	10.6	15.9	10.3
42	10.5	9.1	11.6	9.9	13.3	10.9	13.6	10.9	14.1	10.9	14.4	10.1	15.0	9.8	
44	10.5	9.1	11.6	9.9	13.3	10.9	13.6	10.9	14.1	10.9	14.4	10.1	15.0	9.8	
220	10	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.7	26.4	18.1	27.9	18.3
	12	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.9	18.4
	14	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.9	18.1
	16	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.9	18.3
	18	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.8	18.1
	20	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.4	18.0
	21	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.5	18.0
	23	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.3	27.1	17.7
	25	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.0	17.8
	27	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.0	17.8
	29	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.2	27.0	17.8
	31	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.3	27.0	17.8
	33	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.8	26.4	18.5	27.0	17.8
	35	15.8	13.8	18.7	15.4	21.2	16.6	22.4	17.1	23.9	17.7	26.4	18.5	27.0	18.0
	37	15.5	13.6	18.4	15.2	21.1	16.5	22.4	17.1	23.7	17.7	26.0	18.2	26.6	17.6
	39	15.3	13.5	18.1	15.0	21.1	16.5	22.3	17.0	23.7	17.7	25.7	18.4	26.2	17.5
42	15.0	13.2	17.8	14.7	20.7	16.2	21.9	16.7	23.3	17.5	25.2	18.1	25.7	17.3	
44	14.8	13.0	17.5	14.5	20.4	15.9	21.6	16.4	22.9	17.3	24.8	17.9	25.3	17.0	
46	14.5	12.7	17.2	14.2	20.0	15.6	21.2	16.1	22.5	16.9	24.4	17.5	24.8	16.6	
280	10	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.6	32.7	23.0	34.7	23.2
	12	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.1	34.7	23.4
	14	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.1	34.7	23.0
	16	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.1	34.7	23.3
	18	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	34.7	23.1
	20	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	34.3	23.0
	21	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	34.3	22.9
	23	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.2	33.7	22.6
	25	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	33.7	22.8
	27	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	33.7	22.8
	29	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	33.7	22.8
	31	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.2	33.7	22.8
	33	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.5	33.7	22.8
	35	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.6	32.7	23.5	33.7	23.0
	37	19.4	17.3	23											

# HSP(High static pressure) duct

## 7-2. Capacity tables

### 2) Heating


TC : Total Capacity(kW)

Model	Outdoor temperature (°C, DB)		Indoor temperature (°C, DB)				
			16.0	18.0	20.0	22.0	24.0
	DB	WB	TC	TC	TC	TC	TC
112	-20	-21	7.2	6.9	6.6	6.5	6.5
	-17	-18	8.0	7.6	7.4	7.3	7.3
	-15	-16	8.4	8.1	7.9	7.7	7.5
	-12	-13	8.8	8.6	8.4	8.2	8.1
	-10	-11	9.2	9.0	8.9	8.8	8.7
	-7	-8	9.7	9.6	9.4	9.2	9.0
	-5	-6	10.2	10.1	9.9	9.6	9.3
	-3	-4	10.7	10.6	10.5	10.1	9.7
	0	-1	11.3	11.1	11.1	10.5	10.0
	3	2.2	11.8	11.6	11.5	11.0	10.6
	5	4.1	12.3	12.2	12.0	11.3	10.6
	7	6	12.9	12.7	12.5	11.5	10.6
	9	7.9	13.3	12.9	12.5	11.5	10.6
	11	9.8	13.7	13.1	12.5	11.5	10.6
	13	12	14.0	13.3	12.5	11.5	10.6
	15	14	14.4	13.5	12.5	11.5	10.6
128	-20	-21	7.9	7.7	7.3	7.2	7.2
	-17	-18	8.8	8.5	8.1	8.0	8.0
	-15	-16	9.2	9.0	8.7	8.5	8.2
	-12	-13	9.7	9.5	9.3	9.1	8.9
	-10	-11	10.1	10.0	9.9	9.7	9.6
	-7	-8	10.7	10.6	10.4	10.2	10.0
	-5	-6	11.3	11.1	11.0	10.7	10.3
	-3	-4	11.9	11.7	11.5	11.1	10.7
	0	-1	12.4	12.3	12.1	11.6	11.0
	3	2.2	13.0	12.9	12.7	12.2	11.7
	5	4.1	13.6	13.4	13.2	12.4	11.7
	7	6	14.2	14.0	13.8	12.7	11.7
	9	7.9	14.6	14.2	13.8	12.7	11.7
	11	9.8	15.1	14.4	13.8	12.7	11.7
	13	12	15.5	14.7	13.8	12.7	11.7
	15	14	15.9	14.9	13.8	12.7	11.7
140	-20	-21	9.2	8.9	8.5	8.4	8.4
	-17	-18	10.2	9.8	9.4	9.3	9.3
	-15	-16	10.7	10.4	10.1	9.8	9.5
	-12	-13	11.2	11.0	10.8	10.6	10.3
	-10	-11	11.7	11.6	11.4	11.3	11.1
	-7	-8	12.4	12.2	12.1	11.8	11.5
	-5	-6	13.1	12.9	12.7	12.3	12.0
	-3	-4	13.8	13.6	13.4	12.9	12.4
	0	-1	14.4	14.2	14.0	13.4	12.8
	3	2.2	15.1	14.9	14.7	14.1	13.5
	5	4.1	15.8	15.6	15.3	14.4	13.5
	7	6	16.5	16.2	16.0	14.8	13.5
	9	7.9	17.0	16.5	16.0	14.8	13.5
	11	9.8	17.5	16.7	16.0	14.8	13.5
	13	12	18.0	17.0	16.0	14.8	13.5
	15	14	18.5	17.2	16.0	14.8	13.5
220	-20	-21	20.3	19.5	18.4	17.5	16.8
	-17	-18	20.8	20.0	18.9	18.4	18.2
	-15	-16	21.6	20.7	19.6	19.1	18.8
	-12	-13	23.0	22.1	20.9	20.2	20.0
	-10	-11	24.7	23.7	22.4	21.4	21.1
	-7	-8	25.4	24.4	23.0	22.3	22.0
	-5	-6	26.2	25.2	23.7	23.2	22.6
	-3	-4	26.8	25.8	24.3	24.1	23.1
	0	-1	27.4	26.5	24.9	24.3	23.7
	3	2	28.0	27.0	25.0	24.4	23.6
	5	4	28.3	27.0	25.0	24.4	23.6
	7	6	28.8	27.0	25.0	24.4	23.6
	9	8	28.8	27.0	25.0	24.4	23.6
	11	10	28.8	27.0	25.0	24.4	23.6
	13	12	28.8	27.0	25.0	24.4	23.6
	15	14	28.8	27.0	25.0	24.4	23.6
280	-20	-21	25.4	24.4	23.0	21.9	21.0
	-17	-18	26.0	25.0	23.6	22.9	22.5
	-15	-16	27.0	25.9	24.5	23.8	23.3
	-12	-13	28.8	27.7	26.1	25.2	24.8
	-10	-11	30.9	29.7	28.0	26.8	26.4
	-7	-8	31.8	30.5	28.8	27.9	27.3
	-5	-6	32.7	31.5	29.7	29.0	28.1
	-3	-4	33.5	32.2	30.4	29.8	28.7
	0	-1	34.3	33.1	31.1	30.4	29.3
	3	2	35.0	33.7	31.5	30.4	29.5
	5	4	35.3	33.7	31.5	30.4	29.5
	7	6	35.7	33.7	31.5	30.4	29.5
	9	8	35.7	33.7	31.5	30.4	29.5
	11	10	35.7	33.7	31.5	30.4	29.5
	13	12	35.7	33.7	31.5	30.4	29.5
	15	14	35.7	33.7	31.5	30.4	29.5

### 7-3. Dimensional drawing

1) AM112/128/140FNHDEH\*\*\*

Unit:mm

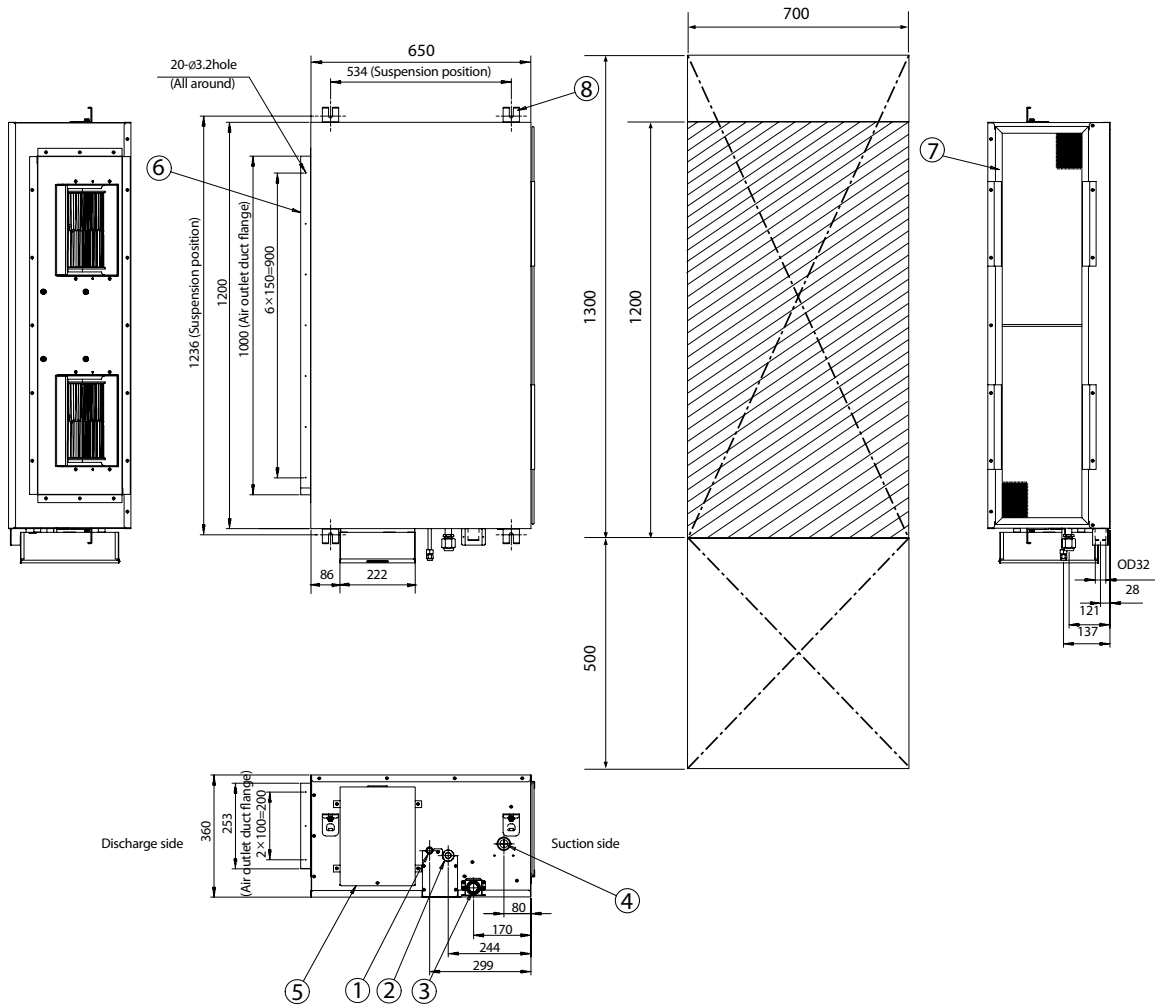


No.	Name	Description
①	Liquid pipe connection	Ø9.52 (3/8")
②	Gas pipe connection	Ø15.88 (5/8")
③	Drain pipe connection without optional drain pump kits	VP25 (OD 32, ID 25)
④	Drain pipe connection with optional drain pump kits	VP25 (OD 32, ID 25)
⑤	Power supply/Communication connection	
⑥	Air discharge grille flange	
⑦	Suction flange	
⑧	Hook	3/8" or M10

# 7 HSP(High static pressure) duct

## 7-3. Dimensional drawing

2) AM220/280FNHDEH\*\*\*

Unit:mm

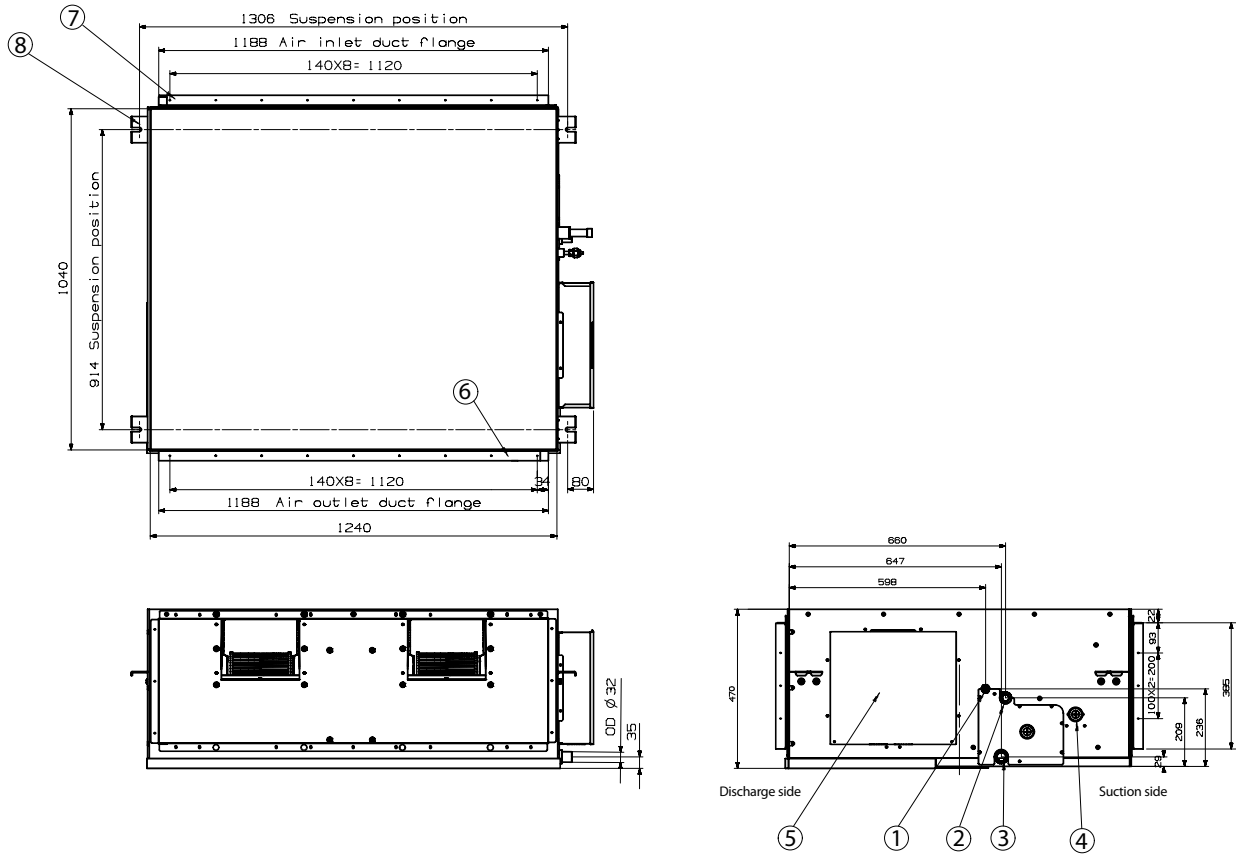


No.	Name	Description
①	Liquid pipe connection	Ø9.52 (3/8")
②	Gas pipe connection	ND220*** : Ø19.05 (3/4") ND280*** : Ø22.22 (7/8")
③	Drain pipe connection without optional drain pump kits	VP25 (OD 32, ID 25)
④	Drain pipe connection with optional drain pump kits	VP25 (OD 32, ID 25)
⑤	Power supply/Communication connection	
⑥	Air discharge grille flange	
⑦	Suction flange	
⑧	Hook	3/8" or M10

# 7 HSP(High static pressure) duct

## 7-5. Sound pressure level

### 1) Operation sound level

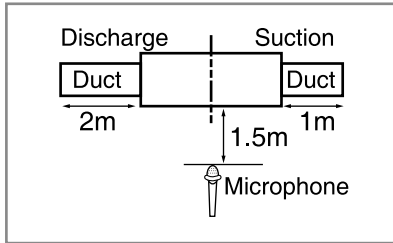

Unit : dB(A)


Model	High	Low
AM220FNHDEH***	45	41
AM280FNHDEH***	48	43

**Note**


- ◆ These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- ◆ Operation sound level may differ depending on operation and ambient conditions.

### 2) NC curves

#### (1) AM220FNHDEH\*\*\*

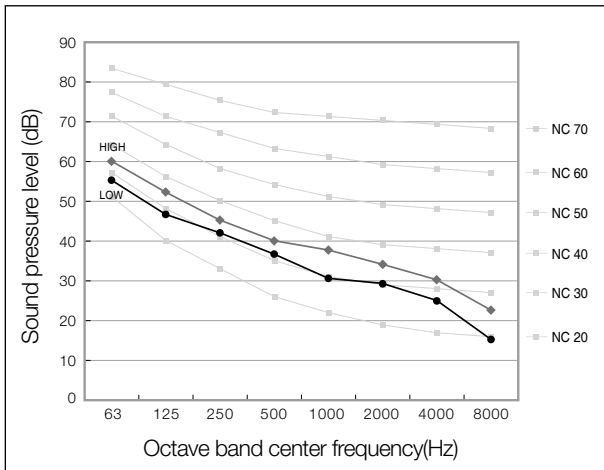


#### (2) AM280FNHDEH\*\*\*

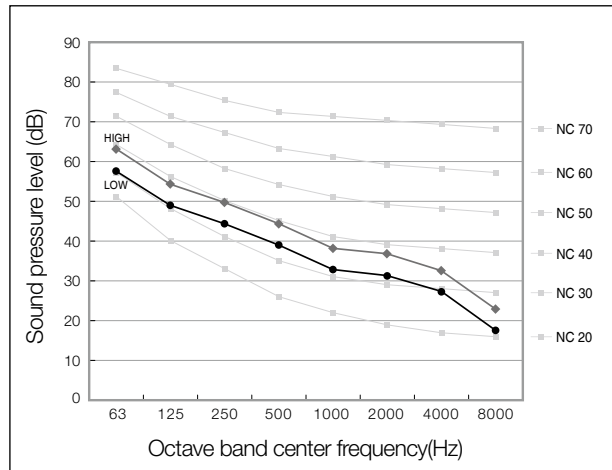


## 7-6. Recommended operation range

(1) AM220FNHDEH\*\*\*

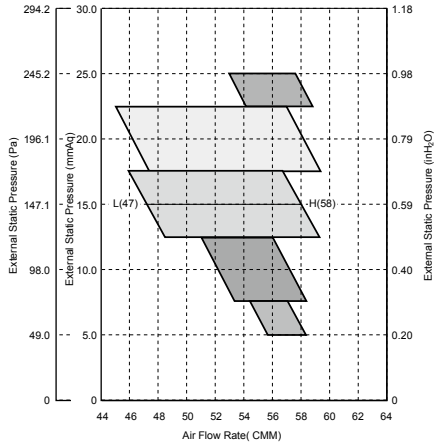

ESP (mmAq)	Option code
5	011054-195097-20DCDC-331110
10	011054-1950C7-20DCDC-331110
15	011054-1950E8-20DCDC-331110
20	011054-19544D-20DCDC-331110
25	011054-19549F-20DCDC-331110

(2) AM280FNHDEH\*\*\*

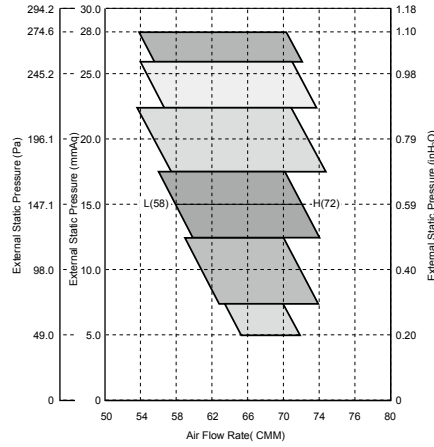

ESP (mmAq)	Option code
5	011054-195407-231C1C-331110
10	011054-195429-231C1C-331110
15	011054-19545B-231C1C-331110
20	011054-19549E-231C1C-331110
25	011054-1955D1-231C1C-331110
28	011054-1955F3-231C1C-331110

**Note**

- ◆ ESP = External Static Pressure
- ◆ The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.